

novagTM


SPRAY EQUIPMENT

THE NEW

NOVAG V

*The most powerful unit to
Spray Foam & Polyurea!*

**POLYURETHANE FORM /
POLYUREA / PU COATINGS**

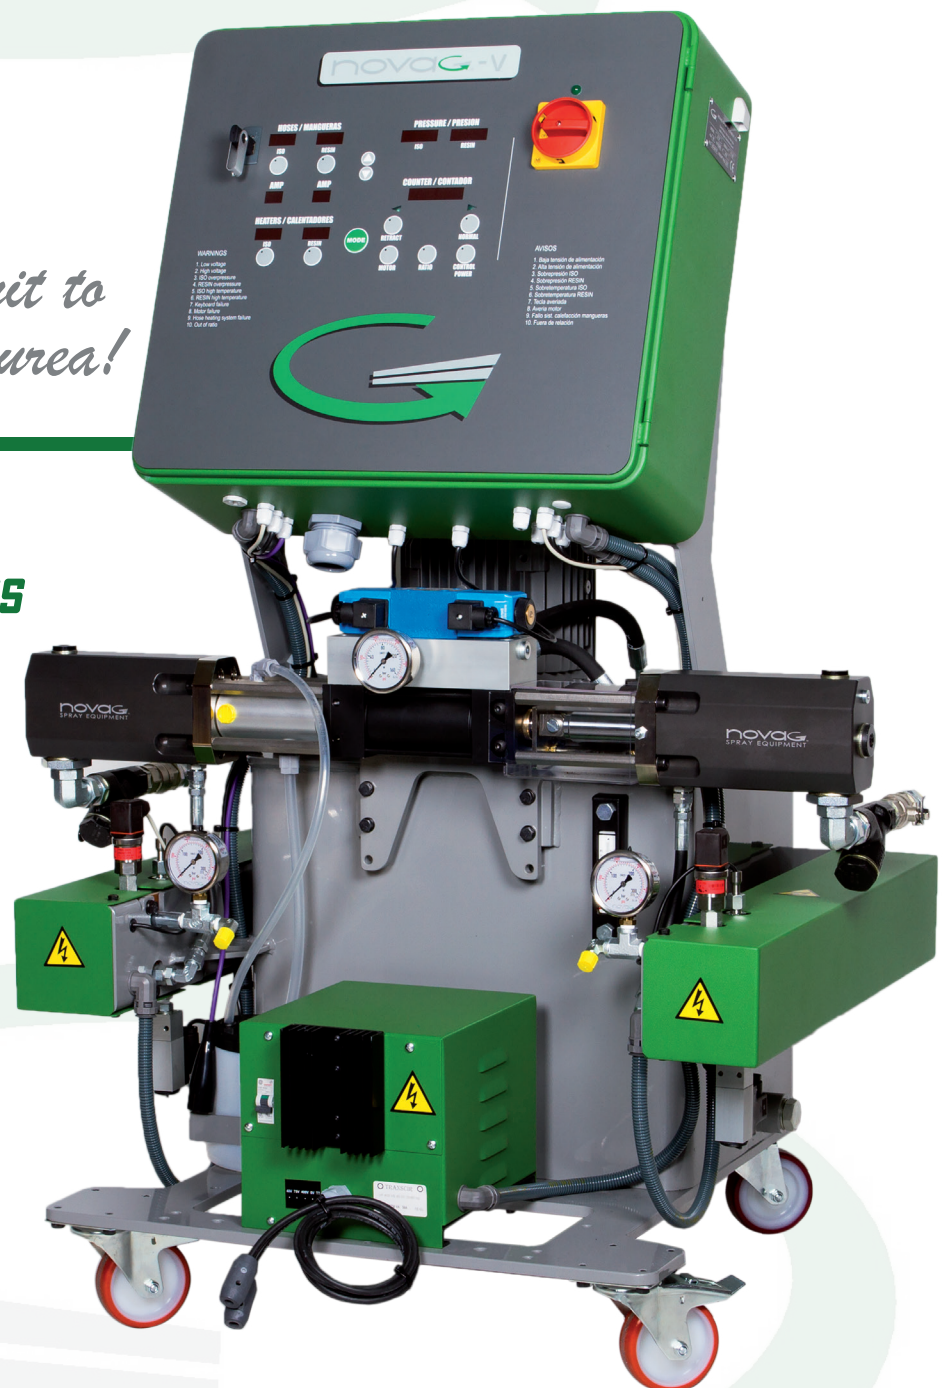

Camí Pla 31, Pol. Ind. Mas Alba
08870 Sitges - Barcelona (Spain)
+ 34 931 148 446 - info@novag.eu
www.novag.eu

Follow us!



FEATURES AND CHARACTERISTICS

The new NOVAG III hydraulically driven proportioning unit has been designed and manufactured to fulfil the most demanding requirements of industrial foam in place applications of two component systems requiring high dosing precision to assure the best mixing quality of the chemical components. Its particular configuration facilitates easy access to all its components, simplifies the control functions and significantly reduces maintenance time.

HOSE HEATING SYSTEM

The hose heating system is designed with 4000W isolation transformer that allows the heating of up to 93m (optional 150m). The system incorporates an innovative concept of heated hose in which the copper resistance element is homogeneously spread around the hose. This allows accurate and uniform control of the application temperature of the products and avoids the heat concentrations that are produced in traditionally manufactured hoses.

NEW PATENTED MONOBLOC PUMP SYSTEM

A double acting hydraulic cylinder drives two directly opposed chemical proportioning pumps. This new reinforced design eliminates asymmetrical loads and assures prolonged life of the pump packing seals as well as assures a constant stabilized pressure in order to achieve perfect mixing of the chemical components. Several pump sizes are available to obtain different volumetric ratios.

TECHNICAL SPECIFICATIONS

Max. Output ratio 1:1 @ 240 Bar [3500 psi]:

22 Kg/min [48,5 lb/min]

Max. Output ratio 1:1 @ 160 Bar [2333 psi]:

18 Kg/min [40 lb/min]

Motor Power: 5,5 Kw **Heating Power:** [2 x 8 Kw] 16 kW

Hose Transformer Power: 4 Kw **Total Power:** 25,5 kW

Electrical consumption: 51 A @ 3 x 400 V / 89 A @ 3 x 230 V

Maximum hose length: 93 m/310 ft

Recommended compressor: 3 HP

Weight [hydraulic tank empty]: 250 Kg

Weight [hydraulic tank full]: 325 Kg

H: 1200 mm/48 in **W:** 945 mm/37 in **L:** 745 mm/30 in

CONTROL PANEL

The control panel consists of a touch screen that incorporates specially designed software to facilitate the selection and control of all working parameters in quick and easy manner. A sophisticated alarm system warns the operation of any error in the process to ensure the right application of the products. As an additional feature, a phase connection alarm is incorporated into the design to avoid costly repairs from errors or mistakes when plugging the machine into the electrical supply.

PRIMARY HEATING SYSTEM

The primary heating system consists of two separate independent tube heaters. Each heater incorporates four 2000W heating elements that supply a total power of 8000W with the necessary control and safety features for the accurate and reliable system performance. The special design of the heaters allows for a ΔT of 50°C reaching application temperatures of 90°C under normal environmental temperature conditions.

NOVAG LOGGER - THE BEST APPLICATION CONTROL TOOL

It is an electronic system for data acquisition.

During the working sessions of the proportioning unit, all measuring values and parameters like temperatures, pressures, working time, alarms, ratio and product consumption will be captured and stored through a USB device [Pen Drive]. Through the Novag Logger software, captured data can be visualized, analyzed, printed and represented graphically into any personal computer.

